

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 25/50, BP 25/50 D



Maximum reliability

Engine and V-belts protected against damage



Powerful vibration

Plastic mat for paving work (optional)




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3

BP 25/50 0,236
BP 25/50 D 0,245

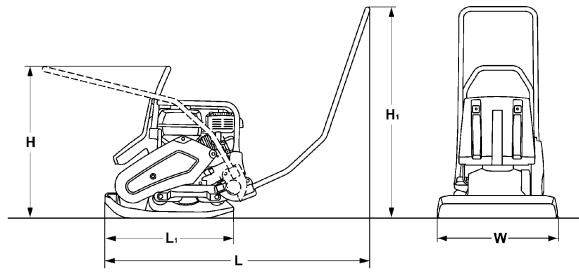

Standard Equipment

- Vibration insulated steering bow, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Fully automatic decompression (BP25/50D)
- Recoil starter
- Engine protection frame
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- Protective covering
- 3-2-1 Warranty
- Automatic shutdown at low oil level (BP25/50)

Dimensions in mm

	H	H1	H2	L	L1	W
BP 25/50	658	962	700	1084	542	500
BP 25/50 D	708	962	700	1084	542	500

Technical Data

	BOMAG		
	BP 25/50	BP 25/50 D	
Weights			
Operating weight CECE	kg	108	122
Basic weight	kg	107	123
Dimensions			
Working width	mm	500	500
Driving Characteristics			
Working speed, max.	m/min	30	30
Max. gradeability (dep. on soil con.)	%	30	30
Drive			
Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		StageV/CARB P.3	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	kW	3,6	3,1
Speed	min-1	3.600	3.000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel consump. aver. during operation	l/h	1,1	0,7
Exciter system			
Frequency	Hz	92	92
Centrifugal force	kN	25	25
Amplitude	mm	1,75	1,75
Capacities			
Fuel	l	3,1	3,0
Water	l	13,5	13,5

Technical modifications reserved. Machines may be shown with options.

Optional Equipment

- Sprinkler system (+10kg)
- Transport wheels (+4kg)
- Plastic mat
- Special painting
- Service Kit (BP25/50)
- TOUGH WARRANTY
- Comfort guide handle
- Central comfort guide handle (BP25/50)



PRE 230 17 010

040219 Sa03

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

